




**BERRY**  
Safes and Security

# MARK I TDR

## TORCH & DRILL RESISTANT QUALITY FLOOR SAFE

**ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT & TRAVELLING, WITH A 12 MONTH WARRANTY ON LOCKS.**

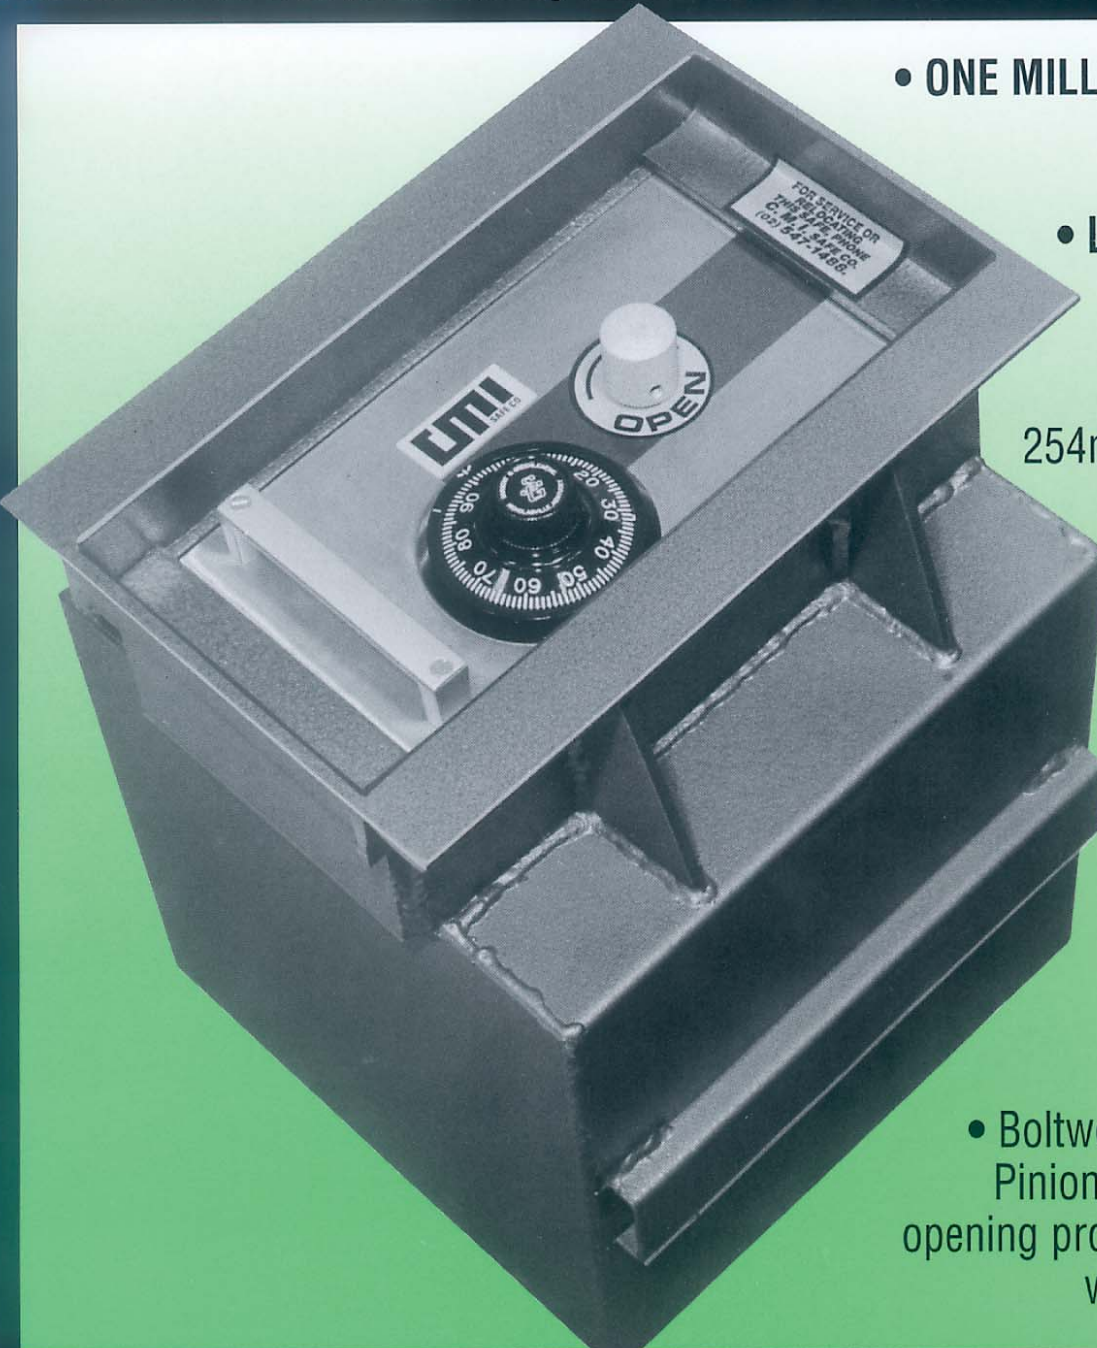

- ONE MILLION CHANGE KEYLESS COMBINATION LOCK

- LARGE DOOR OPENING  
178mm x 127 (7" x 5")  
on hinged door model

- 254mm x 127mm (10" x 5")  
on lift-out door model

- Suitable for mounting in floor

- Proven resistance to drilling, oxy-acetylene cutting and explosives

- Relocking devices incorporated in door

- Boltwork activated by Rack & Pinion mechanism preventing opening problems often associated with ordinary floor safes

**SUGGESTED INSURABLE CASH RATING FOR MARK I TDR  
IN AN UNSUPPORTED (NO ALARMS) DOMESTIC SITUATION IS \$40,000**

**Berry Safes and Security** ABN 24 078 989 572


Address: PO Box 565 Morriset NSW 2264

Phone: 1800 600 633 Mob: 0400 573 886 Fax: (02) 4973 6839

Website: <http://www.berrysafes.com.au>

Email: [tony@berrysafes.com.au](mailto:tony@berrysafes.com.au)


**MADE IN AUSTRALIA**



**BERRY**  
Safes and Security

# MARK I TDR TORCH & DRILL RESISTANT QUALITY FLOOR SAFE

**ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT & TRAVELLING, WITH A 12 MONTH WARRANTY ON LOCKS.**

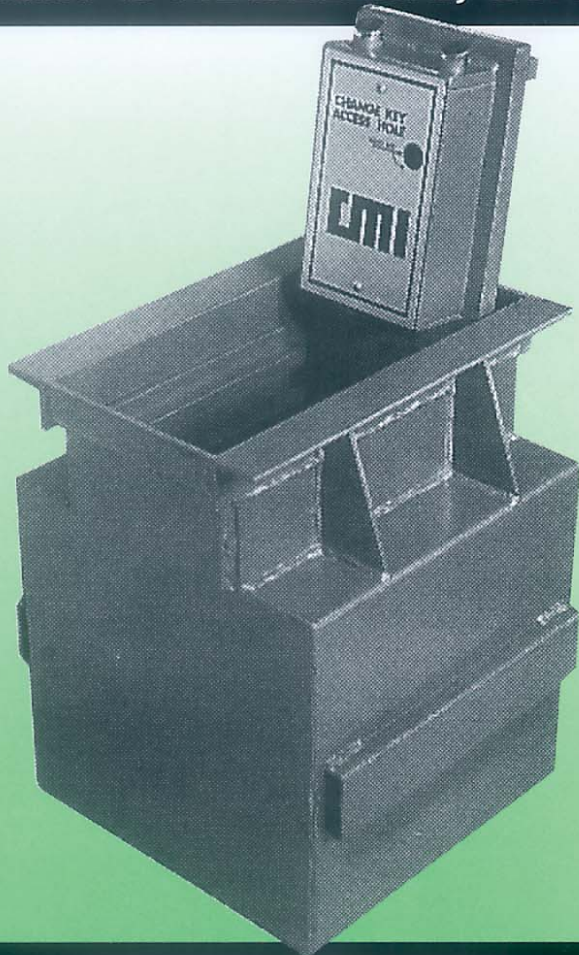

## RECOMMENDED INSTALLATION PROCEDURE

CMI Mark 1 TDR floor safes may be installed in either concrete or timber floors. The opening in floor should be at least 510mm (20") square by 560 deep.

The safe should be secured with a strong mix concrete of at least 40 megapascals (6000 P.S.I.) compressive strength. Steel reinforcing material can also be used to help bond the concrete and provide better security. It is recommended that the mix be poured so that a concrete cover of at least 104mm (4") exists around each side of the safe.

The topping can be brought up to the floor level, but allow about 3mm (1/8") for the lid to fit on to the frame of the safe and finish flush with floor.

In damp situations the concrete should contain a water proofing agent such as "Silasec" or "Yurite" (available from hardware stores). Whilst the concrete is setting the door should be left open for 24 hours.

CMI Safe Co. reserves the right to alter specifications without notice or obligation.

### INTERNAL DIMENSIONS (CAPACITY)

| MODEL | HEIGHT | WIDTH | DEPTH | WEIGHT | PRICE |
|-------|--------|-------|-------|--------|-------|
| TDR 1 | 305mm  | 305mm | 153mm | 32kg   | \$    |
| TDR 2 | 305mm  | 305mm | 229mm | 35kg   | \$    |
| TDR 3 | 305mm  | 305mm | 305mm | 38kg   | \$    |
| TDR 4 | 381mm  | 381mm | 381mm | 48kg   | \$    |

**DELIVERY AND INSTALLATION \$**

**SUGGESTED INSURABLE CASH RATING FOR MARK I TDR  
IN AN UNSUPPORTED (NO ALARMS) DOMESTIC SITUATION IS \$40,000**

**Berry Safes and Security** ABN 24 078 989 572

Address: PO Box 565 Morriset NSW 2264

Phone: 1800 600 633 Mob: 0400 573 886 Fax: (02) 4973 6839

Website: <http://www.berrysafes.com.au>

Email: [tony@berrysafes.com.au](mailto:tony@berrysafes.com.au)

**MADE IN AUSTRALIA**