




**BERRY**  
Safes and Security

# COMMERCIAL GRADE STRONGROOM DOOR AND FRAME FIRE, FORCE, DRILL AND EXPLOSIVE RESISTANT

- **DOOR:** Total thickness 100mm. The "Security" door provides a heavy steel front section supported by drill-resistant hardened plate over all vital lock areas, c/w two relocking devices.
- **BOLTWORK:** Heavy 25mm dia. bolts of high grade steel provide two-way locking into the specially strengthened lock chamber sections at front and rear edges of the door.
- **LOCKING:** A high quality one million change combination lock and a six lever pick resistant key lock.
- **FRAME:** Heavy steel frame 125x125x6mm with 125x18mm threshold plate at bottom.
- **HINGES:** Adjustable heavy duty with hardened pins on ball bearing axis (Pre-lubricated)
- **FIRE RESISTANT:** Fire pan fitted to rear of door with approved high fire resistance compound.
- Internal release mechanism standard.
- Door may be ordered with either left or right hand hinging.
- Door can be manufactured to suit any size wall opening.
- Digital combination, duress and time delay locks may be fitted as an optional extra.

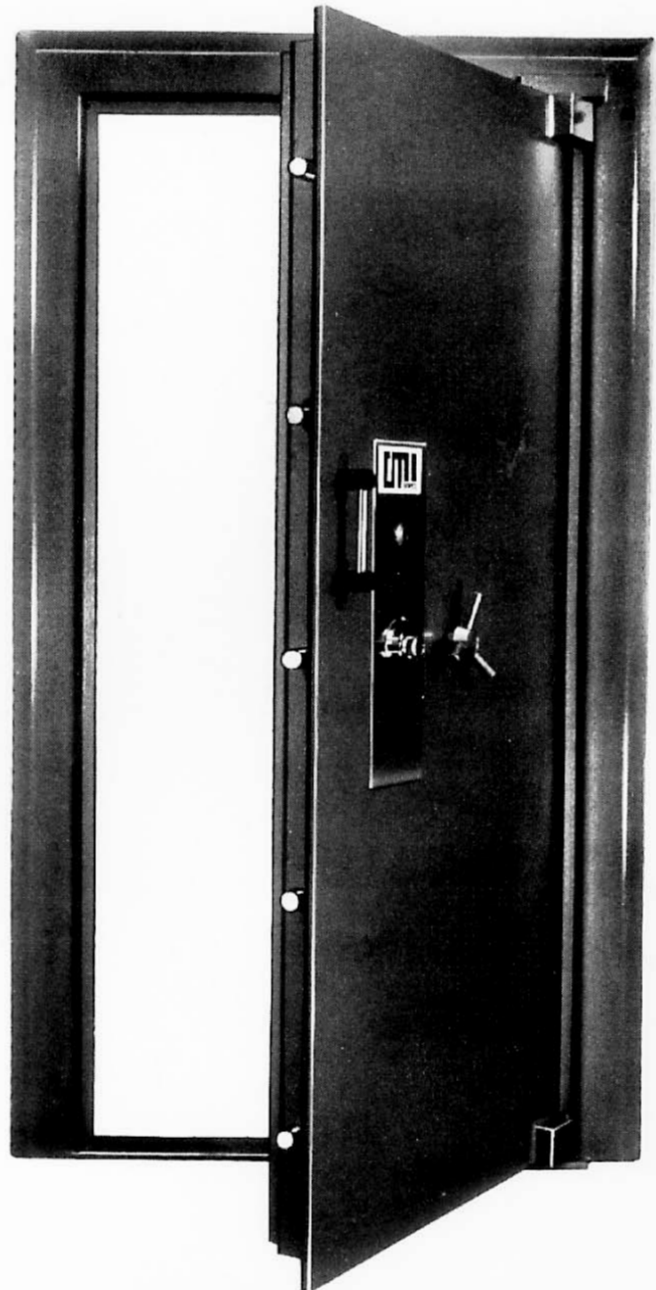

**Berry Safes and Security** ABN 24 078 989 572

Address: PO Box 565 Morriset NSW 2264

Phone: 1800 600 633 Mob: 0400 573 886 Fax: (02) 4973 6839

Website: <http://www.berrysafes.com.au>

Email: [tony@berrysafes.com.au](mailto:tony@berrysafes.com.au)

